

## Direct-operated Reducing Valve


### Technical specification




Specification	05
Max. working pressure (MPa)	31.5
Max. Flow (L/min)	15
Working fluid	Mineral oil; phosphate-ester
Fluid temp. (°C)	-20~80
Viscosity (mm <sup>2</sup> /s)	-2.8~500
Cleanliness	The maximum allowable cleanliness of the oil should be according to 9th degree of Standard NAS1638. It is suggested that the minimum filter rating should be $\beta_{10} \geq 75$ .

HYDR5DP is direct-operated reducing valve for pressure relief in minor circuit, used to reducing pressure in some circuit of the system

### Model description

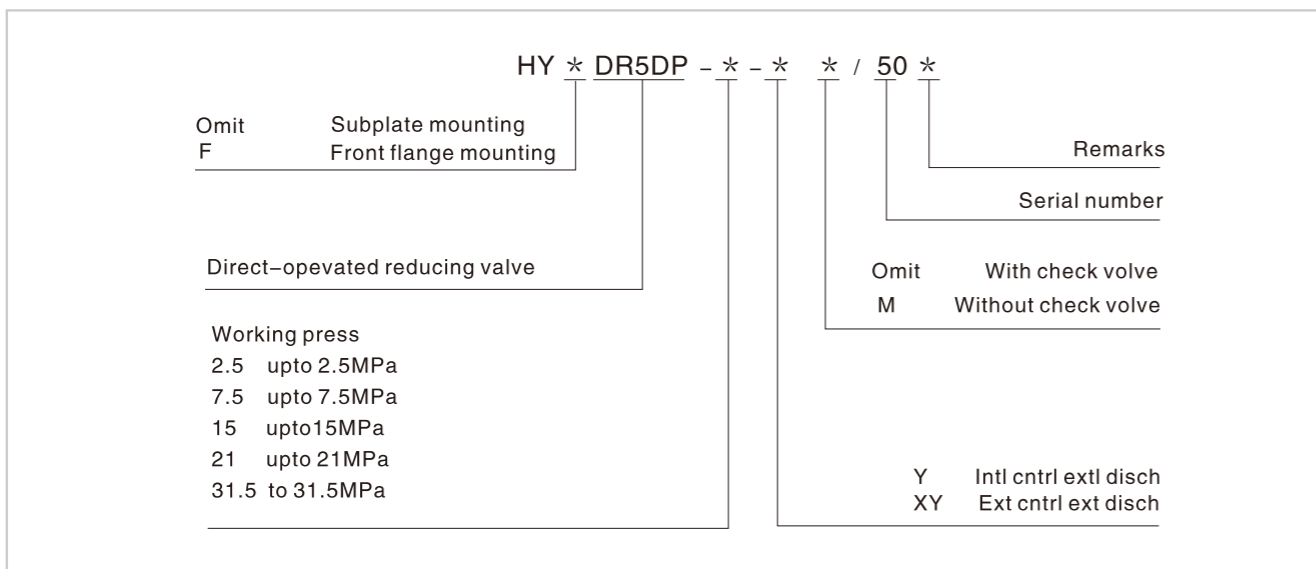

### Code symbol

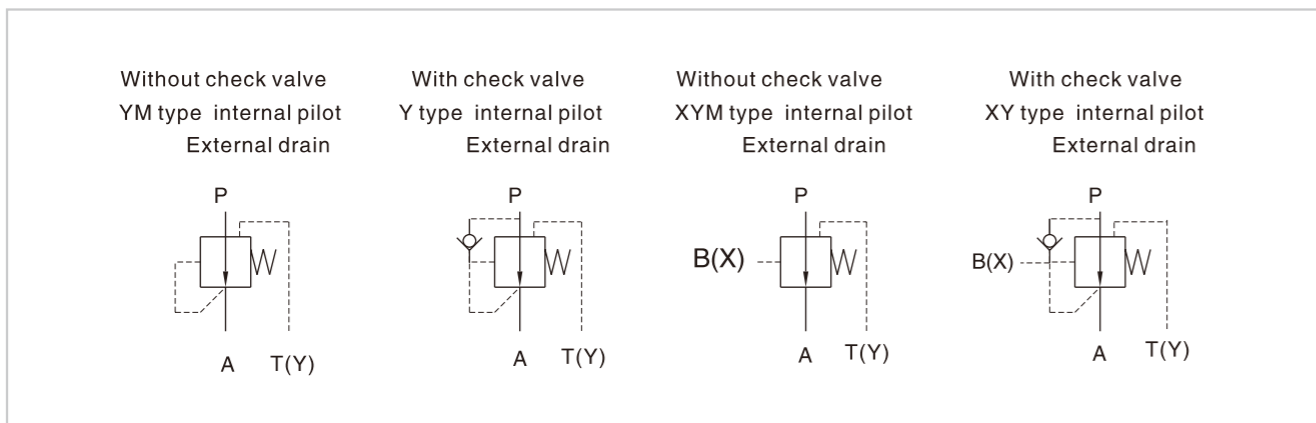

## Pressure Reducing Valve

### External dimensions

