

HYFRA10 (Regulator Pressure)

Description

A cartridge-style adjustable pressure-compensated flow control valve.



Operation

The valve maintains a constant flow within specified accuracies from ① to ② regardless of downstream load pressure. When flow produces a minimum predetermined pressure differential across the compensator spool control orifice, the spool shifts against the spring force to throttle the flow and maintain the flow setting. Reverse flow is not regulated.

Specifications


Operating pressure:	240 Bar
Flow setting:	3 – 26 L/min.
Flow maintenance accuracy:	± 15%
Temperature:	(-30°C To +120°C) with NBR material seals
Fluids:	Mineral-based fluids with viscosities of 7.4 to 420 cSt.
Cavity:	HY10-2, see page H.1.3
Body material:	6061-T6 Aluminum alloy rated to 207 bar, steel & ductile iron rated to 350 bar

Code symbol , profile and pressure drop vs.flow

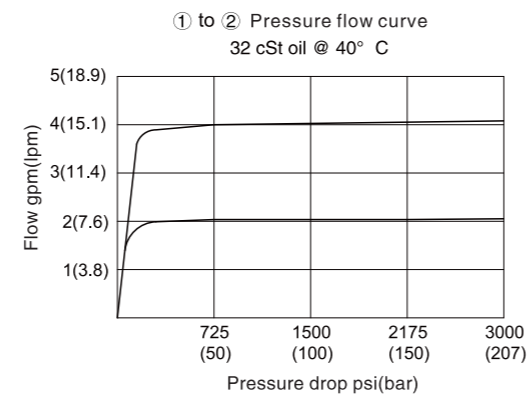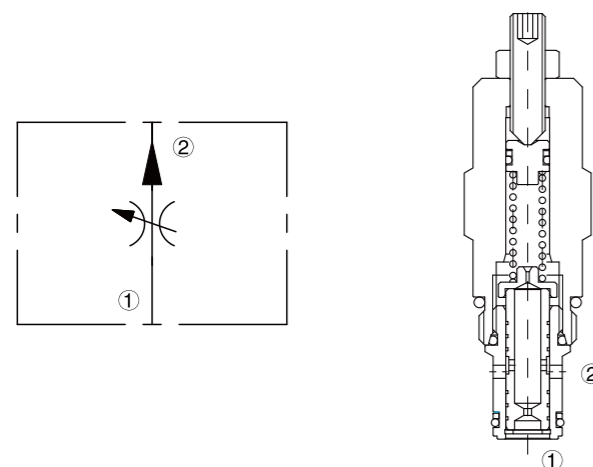

HYFRA10 (Regulator Pressure)

External dimensions

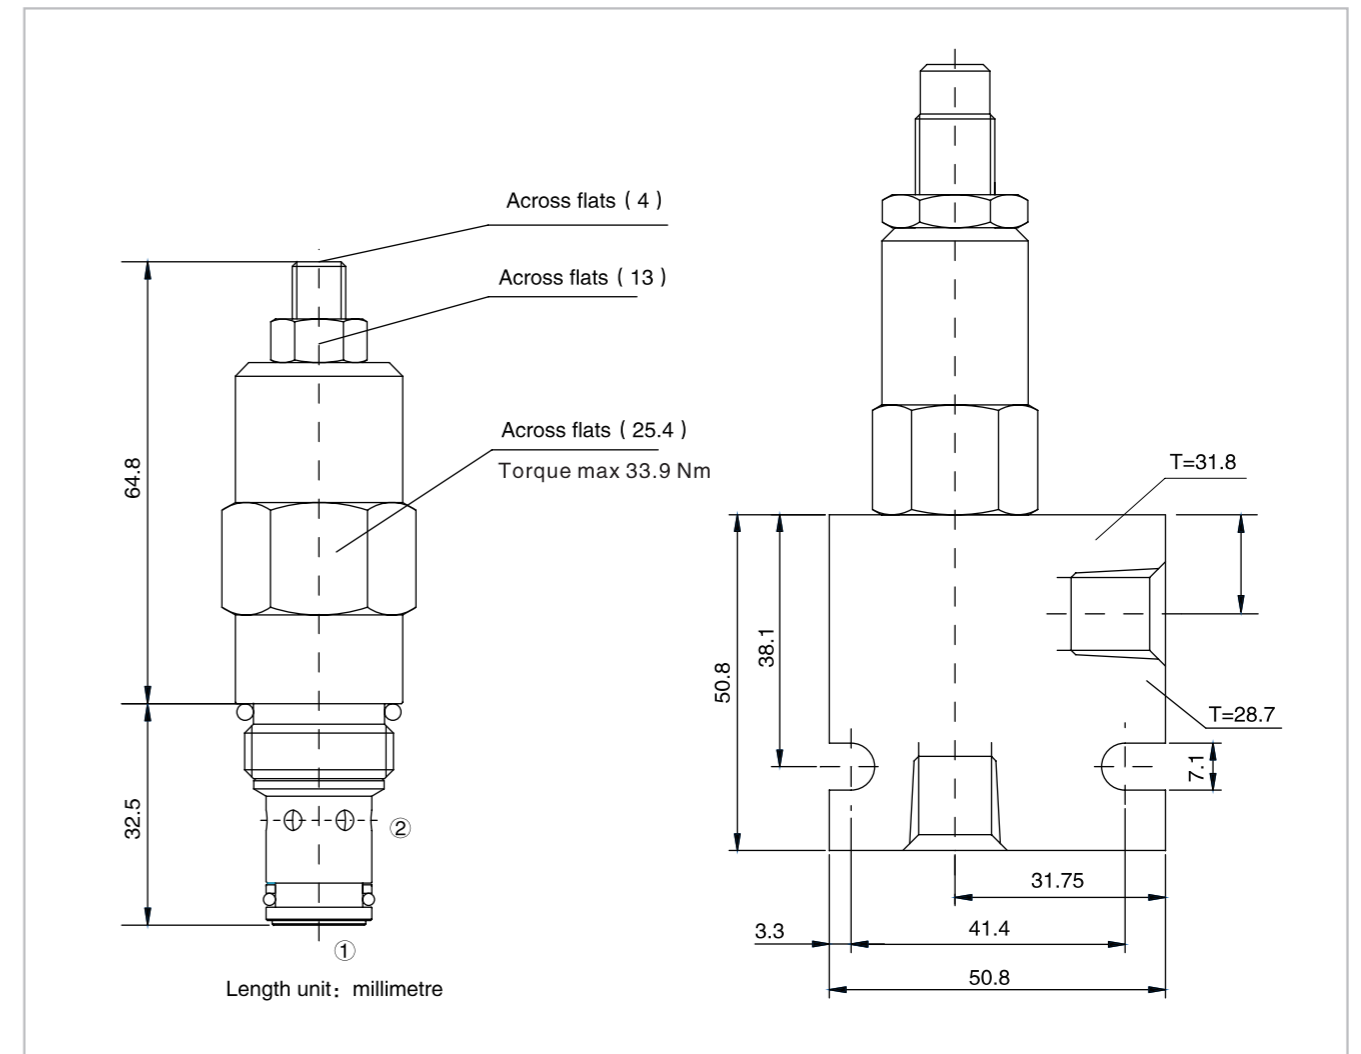

Material science and order model

